

# BUTANE, METHYLACETYLENE, PROPADIENE IN PROPYLENE MATRIX WITH MICRO-GC

**Technique :** Micro-GC

**Column :** Alumina 14m

**Carrier gas :** Helium



**Injector :** Variable volume

**Column temperature :** 75°C

**Injection time :** 50 ms

**Column pressure :** 32 psi

**μTCD sensitivity :** Standard

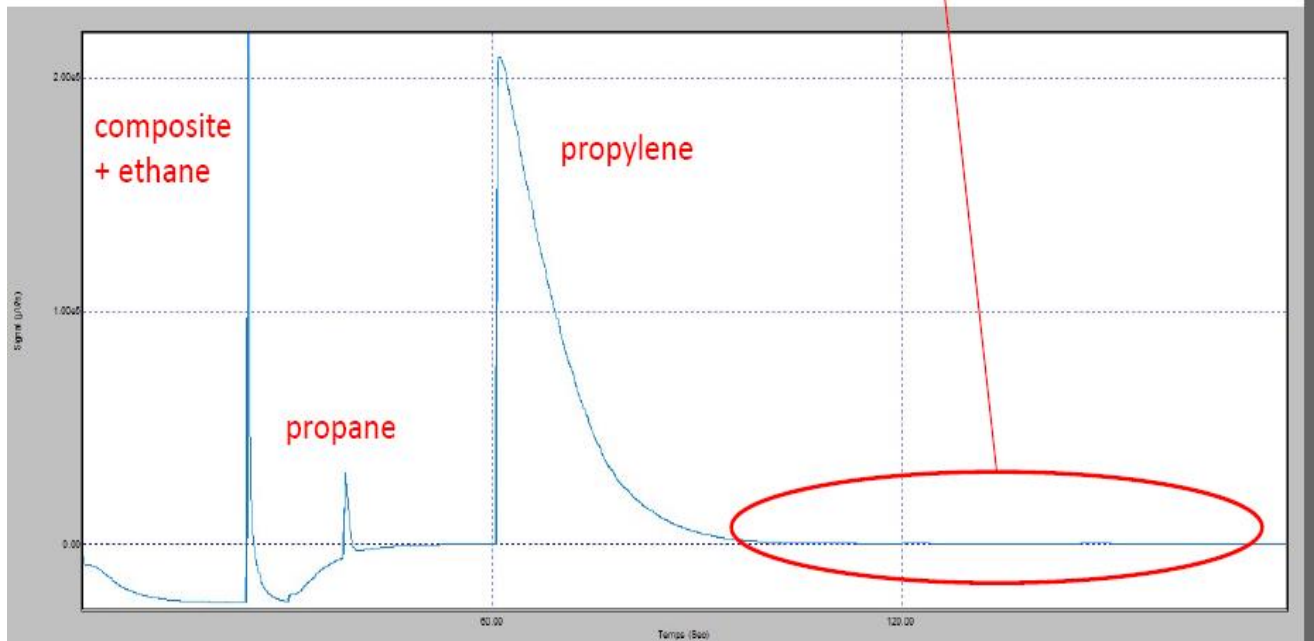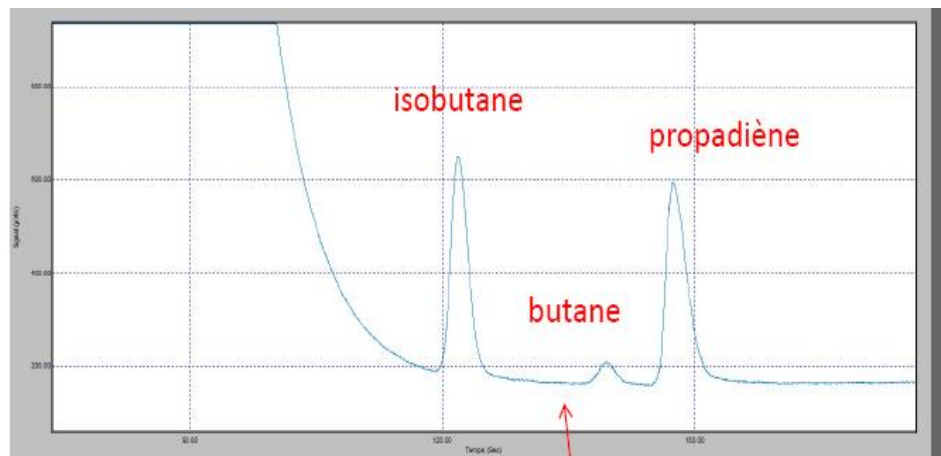

More information : [www.sra-instruments.com](http://www.sra-instruments.com)